

MUTINA


Dintorni

by Inga Sempé




EN

General information
Laying and maintenance tips
Colors
Technical features
Packing

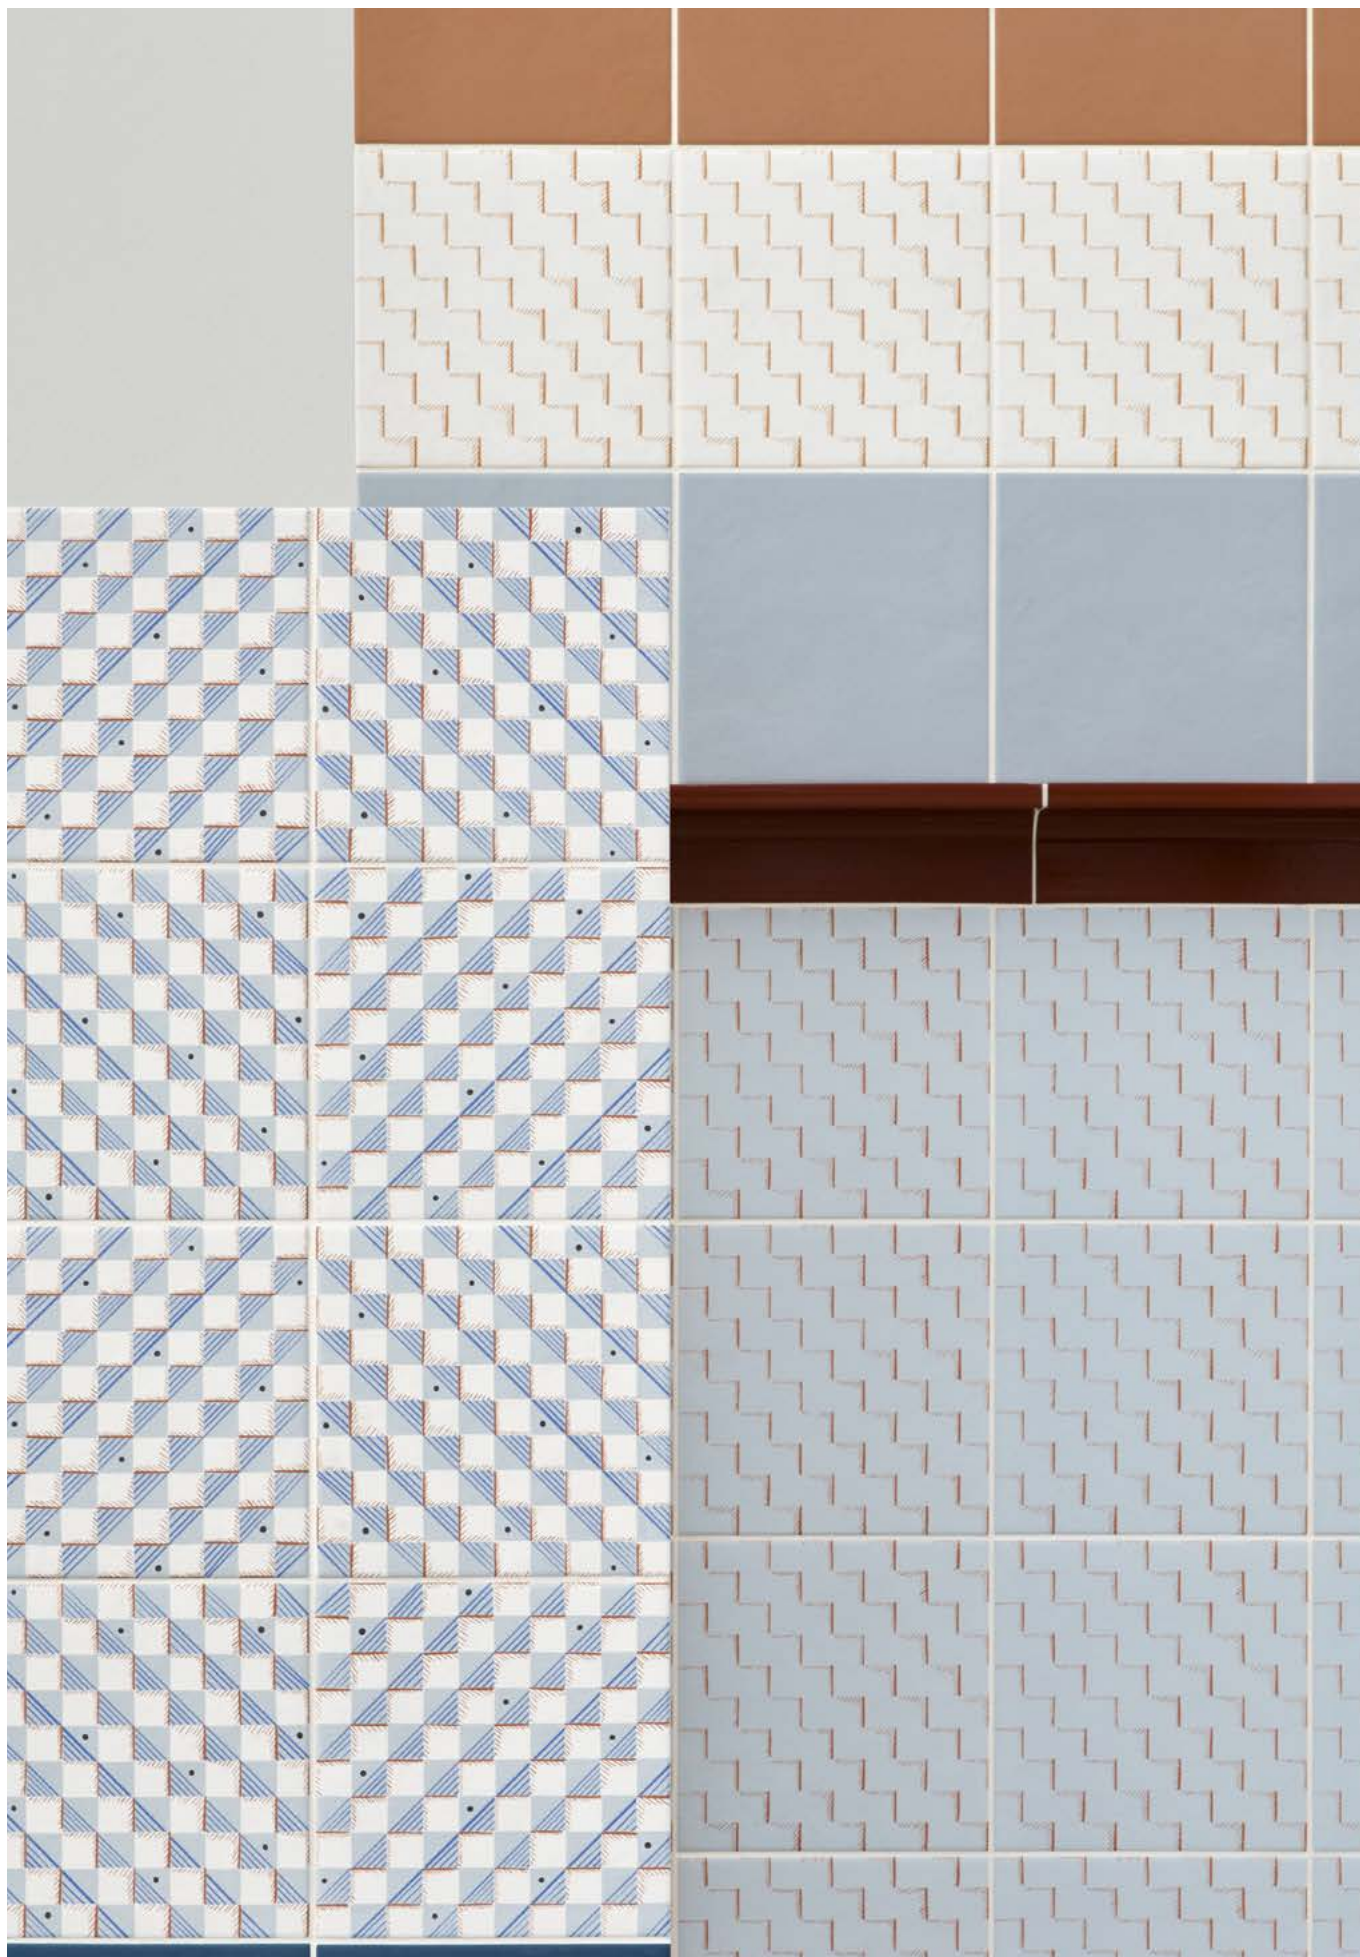

General information




collection	Dintorni
design	Inga Sempé, 2025
production	Industrial
material	Glazed and not rectified porcelain stoneware
thickness	9,5 mm
nominal size	20,5x20,5
specification	– 5 colours – 3 patterns – 1 combination – 2 "Raccordo": caramel and nero
special pieces	Raccordo Ceramic profile in glazed extruded body, with a glossy finish.
category	UNI EN 14411 App G (Bla group) GL



20,5-20,5 cm
8"-8"

special pieces

Raccordo
7,3x7,1x33 cm
2,9"-2,8"-13"

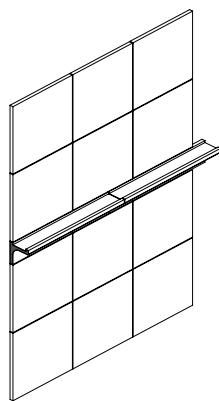

The element has multiple functions: if used in one direction it acts as a connection between the floor and the covering, while rotated in the other it can be used as a closure for a boiserie, or simply generate a space to be used as a small shelf.

Laying and maintenance tips

use	Floor, wall – indoor, outdoor.
installation	For an even, smooth shading effect when laying, alternate material from several different boxes
recommended adhesive	Adhesive for porcelain stoneware
recommended joints	2 mm
recommended fillers	cement-based grout / epoxy grout for polished versions (cove base/shelf), a fine-grain grout must always be used. Download the Grout Tables.
cleaning at the end of installation	CEMENT-BASED GROUT: Buffered acid (e.g. DETERDEK PRO by FILA or similar). Wet the floor with water, saturating the joints, and dilute the product 1:5 with water and pour it on the floor. Wait for 2-3 minutes then use a white scotch Brite pad and rinse well with clean water. EPOXY GROUT: Alkaline detergent (e.g. FILA CR10 by FILA). FILA CR10: apply pure, wait for 30 minutes then use a green scotch Brite pad. SILICONE: Solvent for silicone e.g. FILA ZERO SIL. Put it straight onto the stain, wait for 20 minutes and remove the mark using scotch Brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable. RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly. POLISHED VERSIONS: For cleaning at the end of the work, and for ordinary cleaning, we recommend limiting the use of abrasive cleaning instruments (such as iron sponges or steel scrubbing pads) as far as possible. This indication must be strictly complied with for tiles with a polished surface, because they are more vulnerable to scratching, dulling, etc.
general cleaning (installed tiles)	You are recommended to use specific detergent for porcelain stoneware diluted in water.
calibers (real size)	cal 1 : from 203,6x203,6x9,5mm to 205x205x9,5mm cal 0 : from 202,1x202,1x9,5mm to 203,5x203,5x9,5mm (calibers depend on the production lot, we recommend to ask in advance)


Colours



Scala Neve



Scala Sole




Scala Ombra



Bandiere Neve




Bandiere Sole



Bandiere Ombra



Dama Neve



Dama Sole




Dama Ombra



Isola




Azzurro




Terracotta



Verde Chiaro



Verde Scuro



Blu

Raccordo



Nero



Caramel

For information about the available grouts, please contact the sales department.

Technical features

STANDARD	FEATURES	VALUE REQUIRED	DINTORNI
ISO 10545/3	water absorption	< 0,5%	0,07% raccordo >10%
ISO 10545/4	breaking strength	≥ 1300 N	in conformity with standard
	modulus of rupture	≥ 32 N/mm ²	
ISO 10545/9	resistance to thermal shock	no visible alteration	resistant
ISO 10545/12	frost resistance	no visible alteration	resistant
ISO 10545/13	resistance to acids and alkalis (low and high concentration)	declared value	A
	resistance to household cleaning agents and swimming pool chemicals	minimum class B	A
ISO 10545/14	stains resistance	minimum class 3	5
DIN 51130			R11
DIN 51097			C
DCOF		> 0,42	0,74
Pendulum BS (EN 16165-c)			55 dry 45 wet
Pendulum AS/NZS (4586313 app A)			44 P3
LEED CERTIFICATION 4.1			20% recycled materials
VOC Emission			available upon request
EPD			available upon request
Declaration of Contents			available upon request
SVHC declaration			available upon request



Packing

SIZE	PCS-SQM	PCS-BOX	SQM-BOX	BOX-PAL	KG-BOX	KG-PAL	SQM-PAL
20,5-20,5 cm	23,88	16	0,67	48	13,47	646,56	32,16
Isola 20,5-20,5 cm	23,81	20	0,84	36	16,84	606,24	30,24
Raccordo 7,3x7,1x33 cm	-	9	2,97 ml	-	7,60	-	-